



Retail Surveillance Solution

Requirements

Real-time Supervision

Real-time Monitor



Access Control

Environment




Requirements

Information Statistics

People Counting



POS Information




Your Order  7	
1 x Pizza Capriciosa	17,5 EUR
1 x Crispy Strips	18,5 EUR
2 x Garlic Sauce	3,0 EUR
3 x Muffin	7,5 EUR
Total: 46.5 EUR	




Solution Topology

Small Business Solution

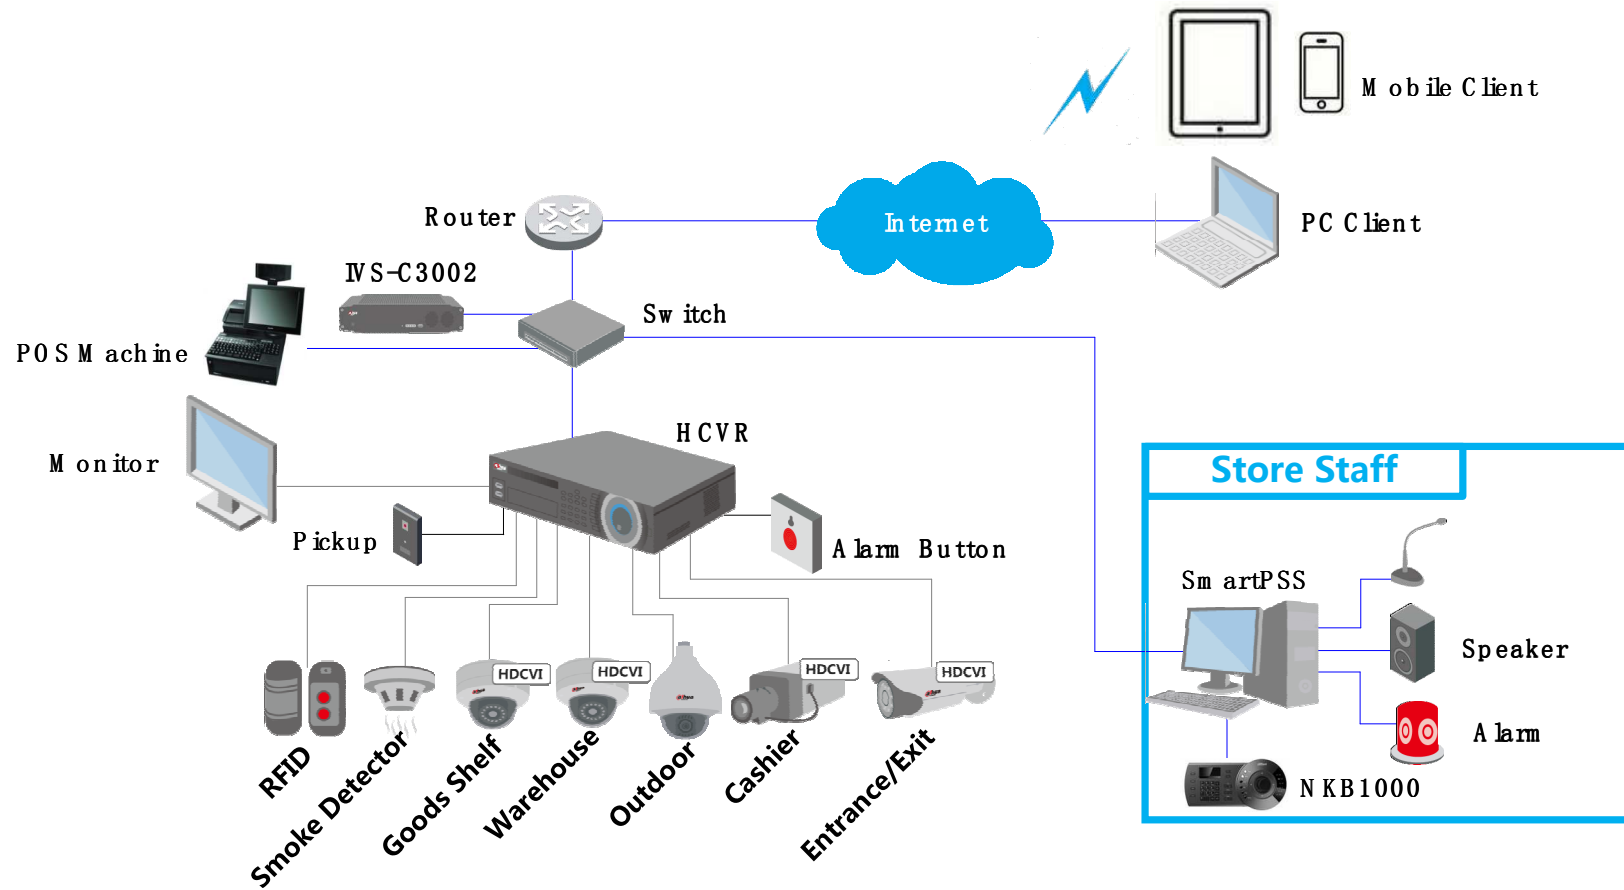


Solution Topology

Medium Business Solution

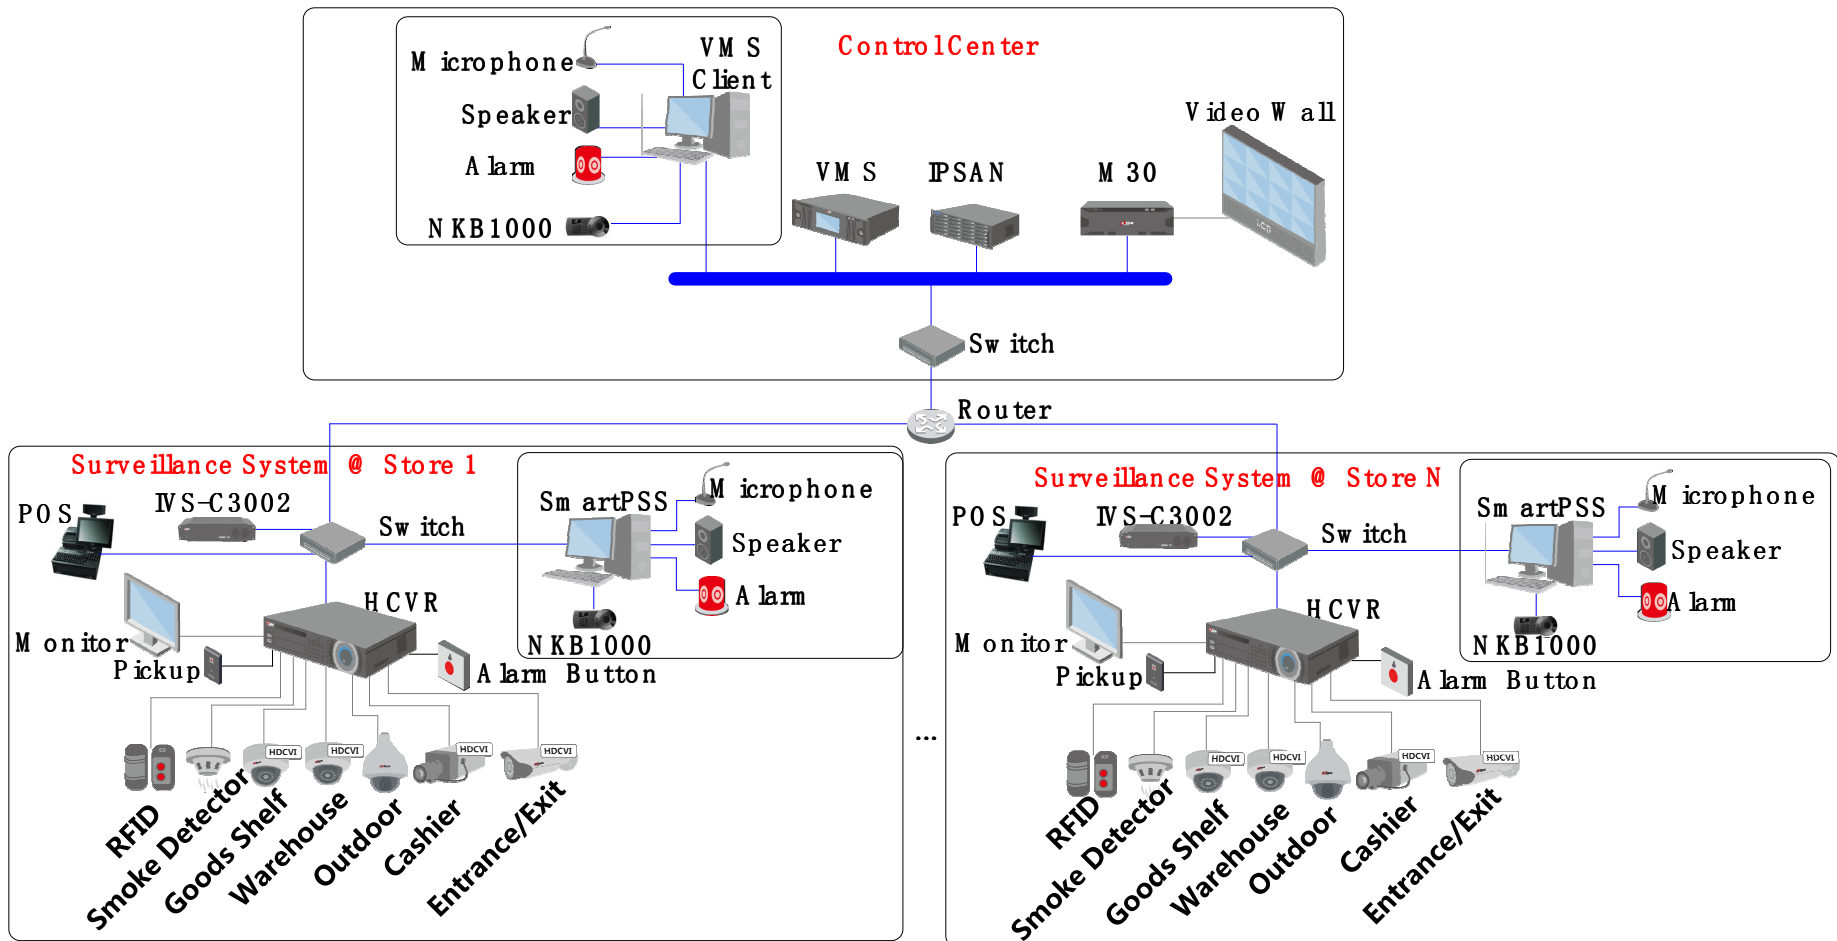

Solution Topology

Large Business Solution

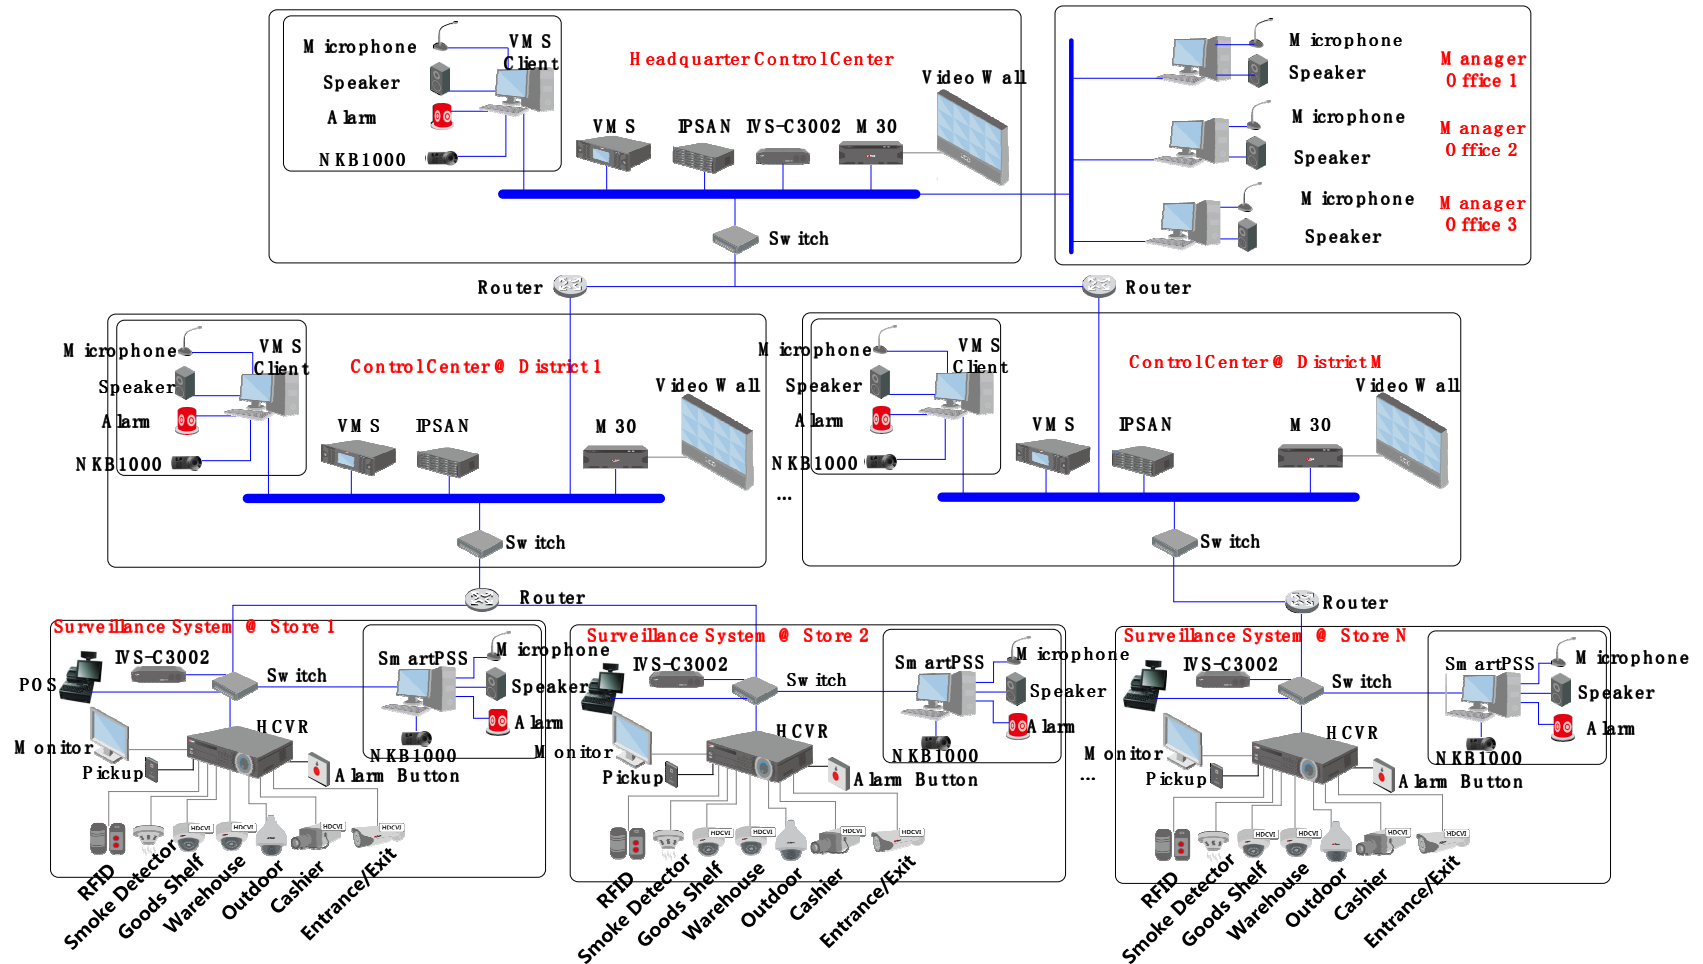

Solution Features

High Integration



Video



Alarm



Access Control




POS



7*24 Hours


Solution Features

People Counting

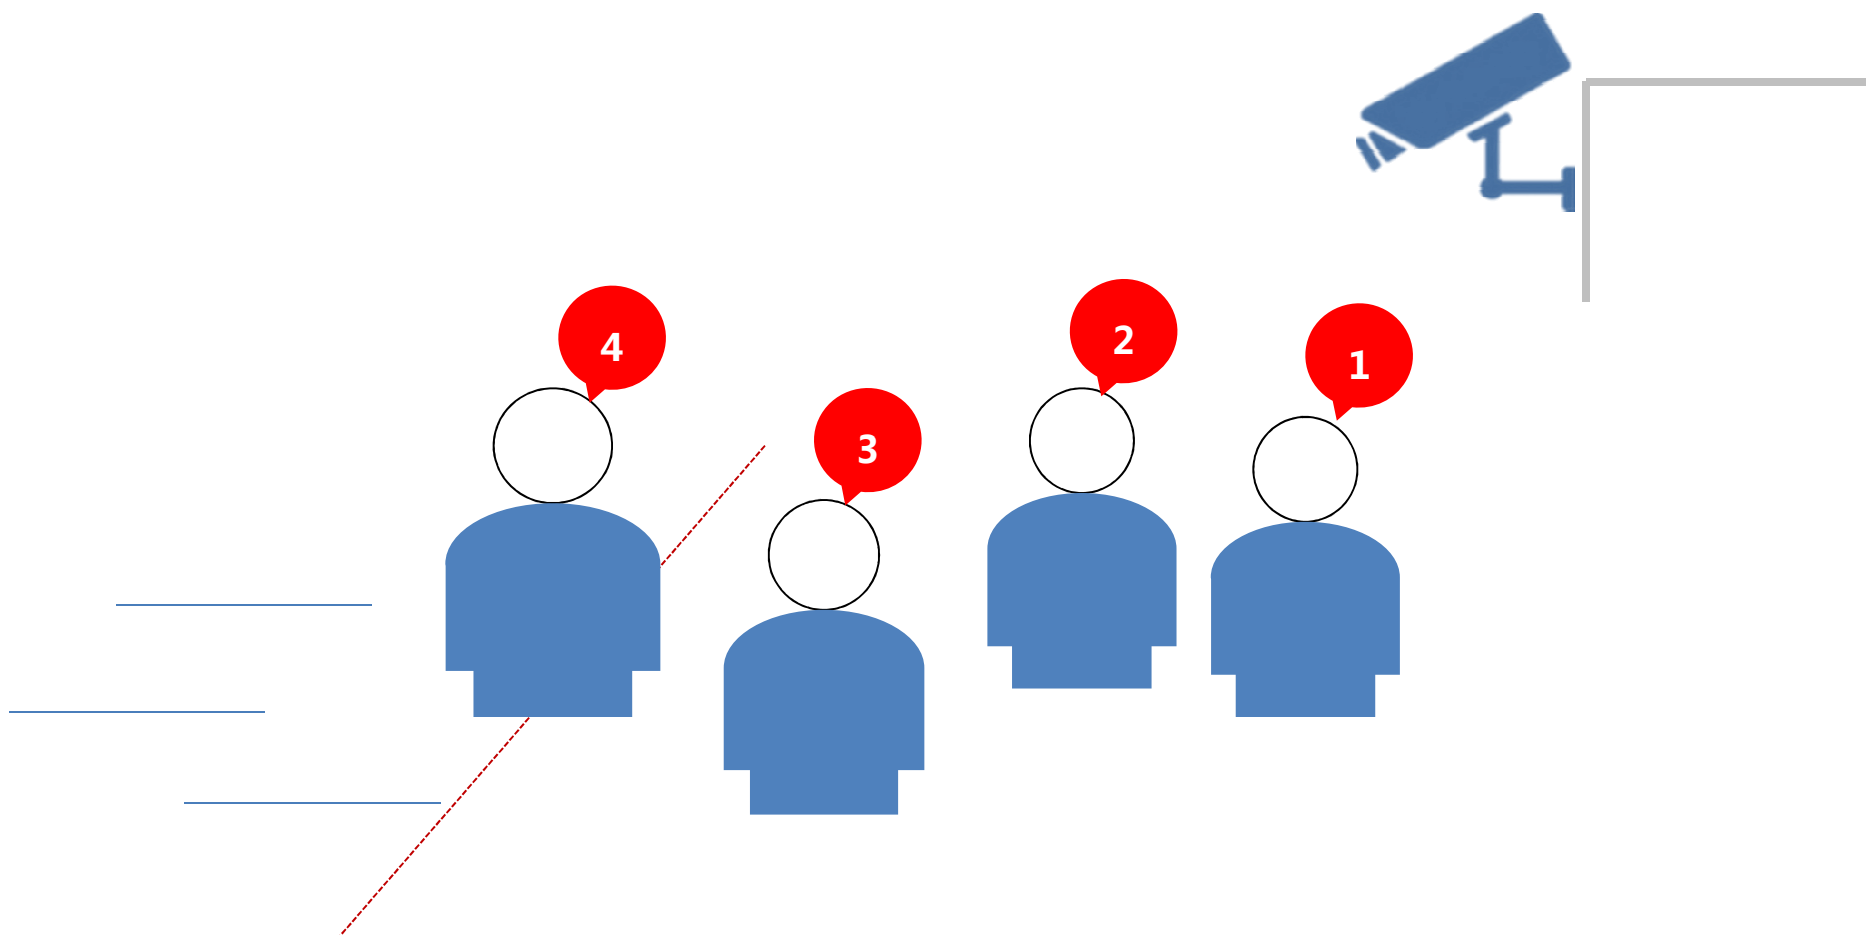

Solution Features

People Counting

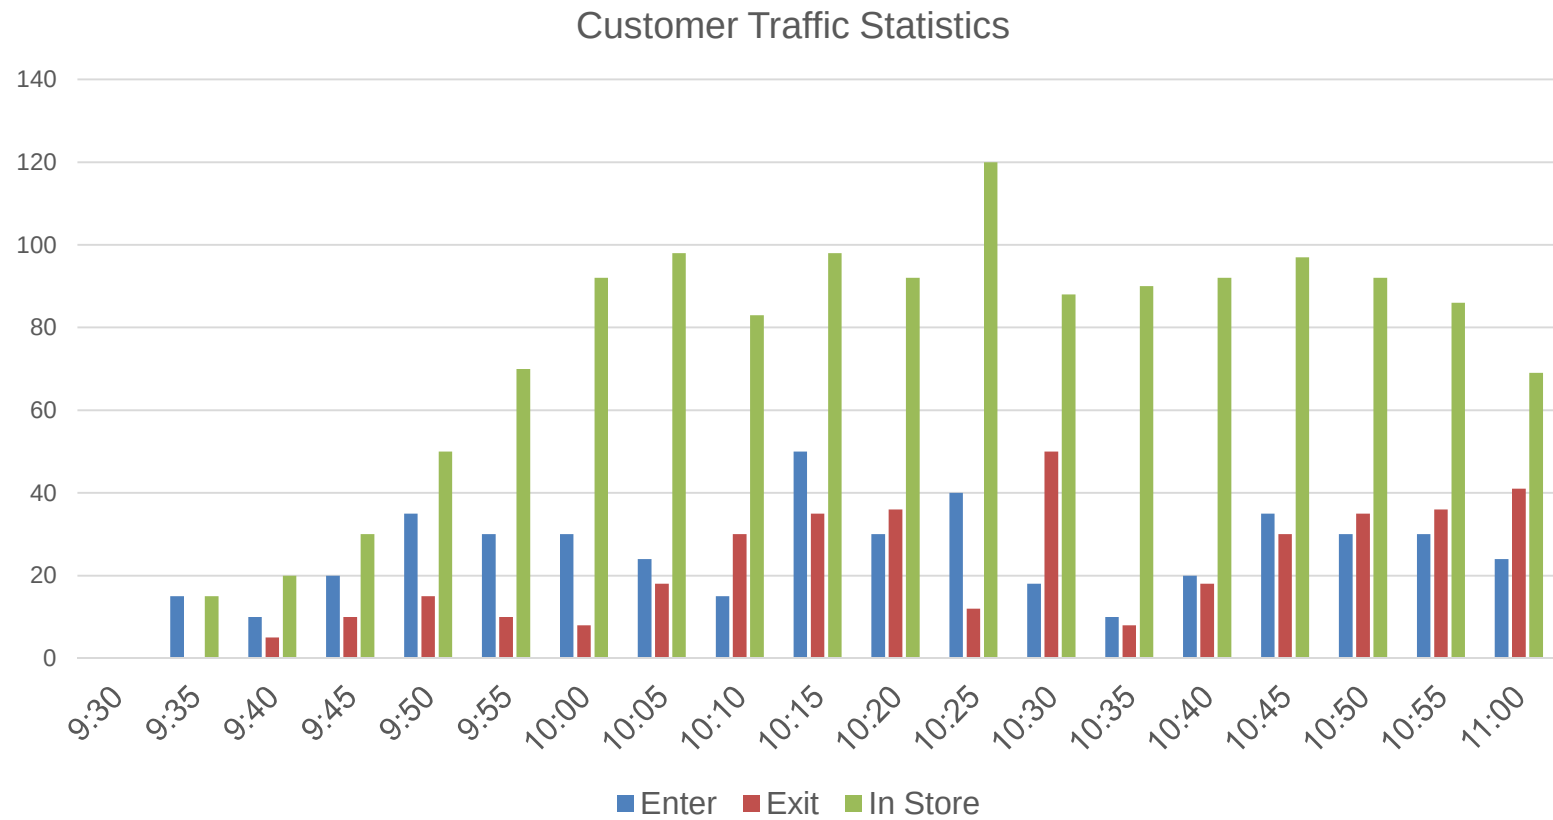

Solution Features

POS Integration

POS info OSD



Solution Features

POS Integration

POS log links record

Item 1: xxx

Item 2: xxx

Item 3: xxx

Item 4: xxx

Item 5: xxx

Item 6: xxx

Item 7: xxx

Item 8: xxx




Example

Supermarket



Example

Control Center

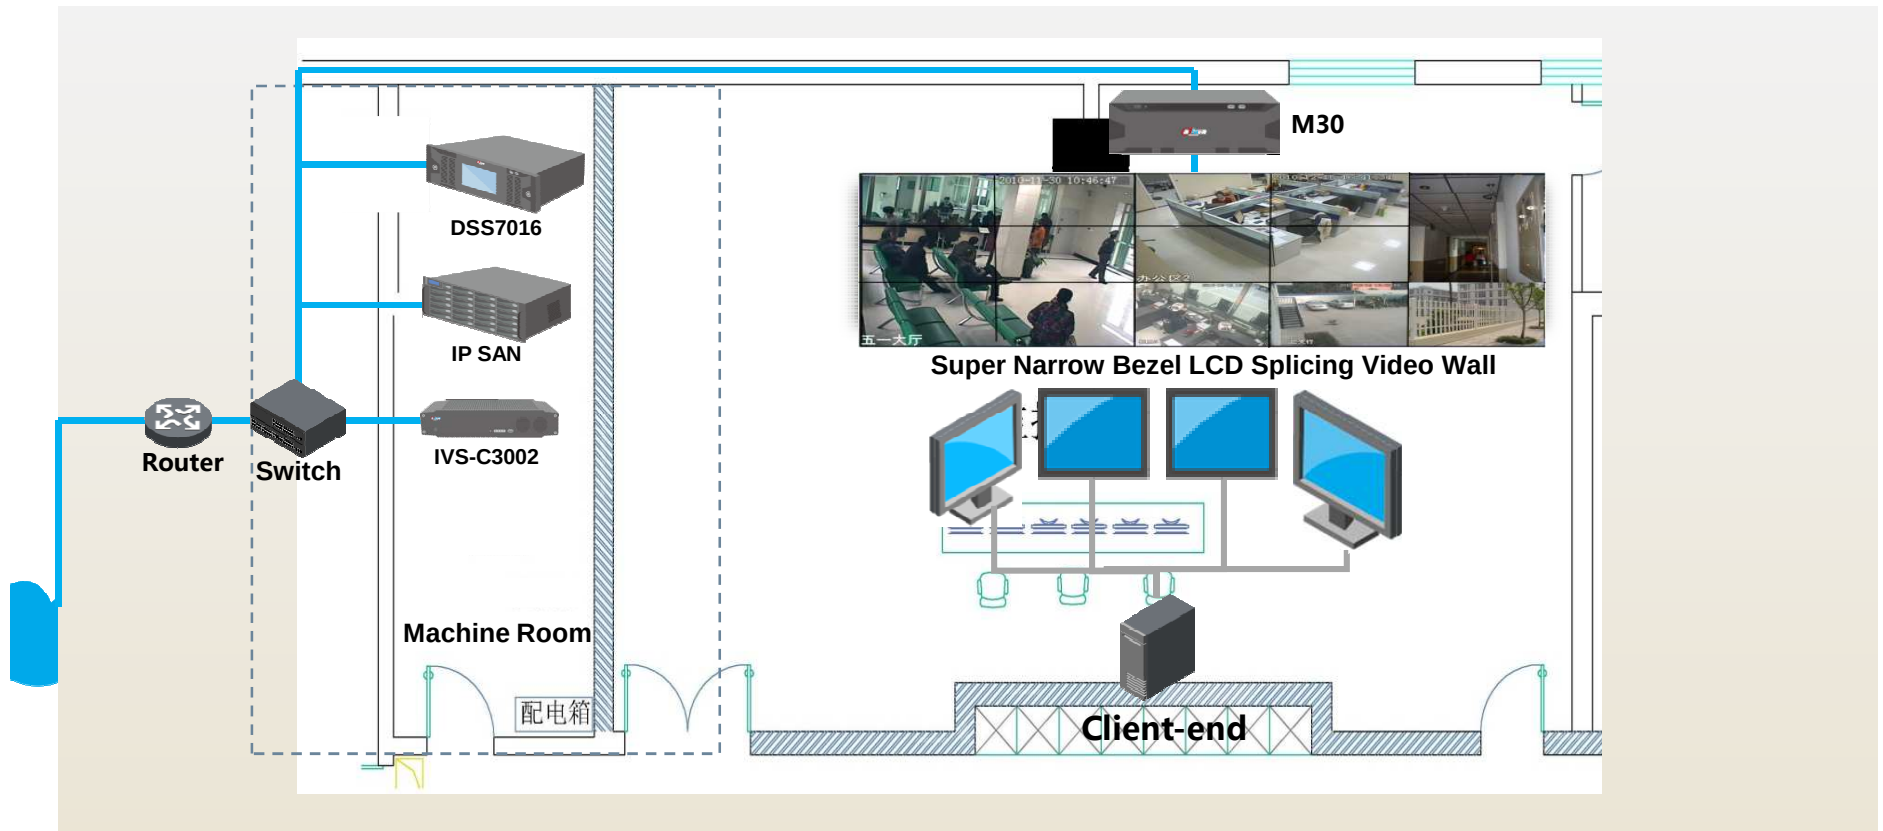

Solution Features

Easy Deployment & High Cost Effective

HDCVI

1080P

3 in 1


500m

\$\$

Key Products

DSS7016

DSS7016



Embedded



Linux



Disk



Mobile phone client




B/S and C/S client



Key Products


DSS7016

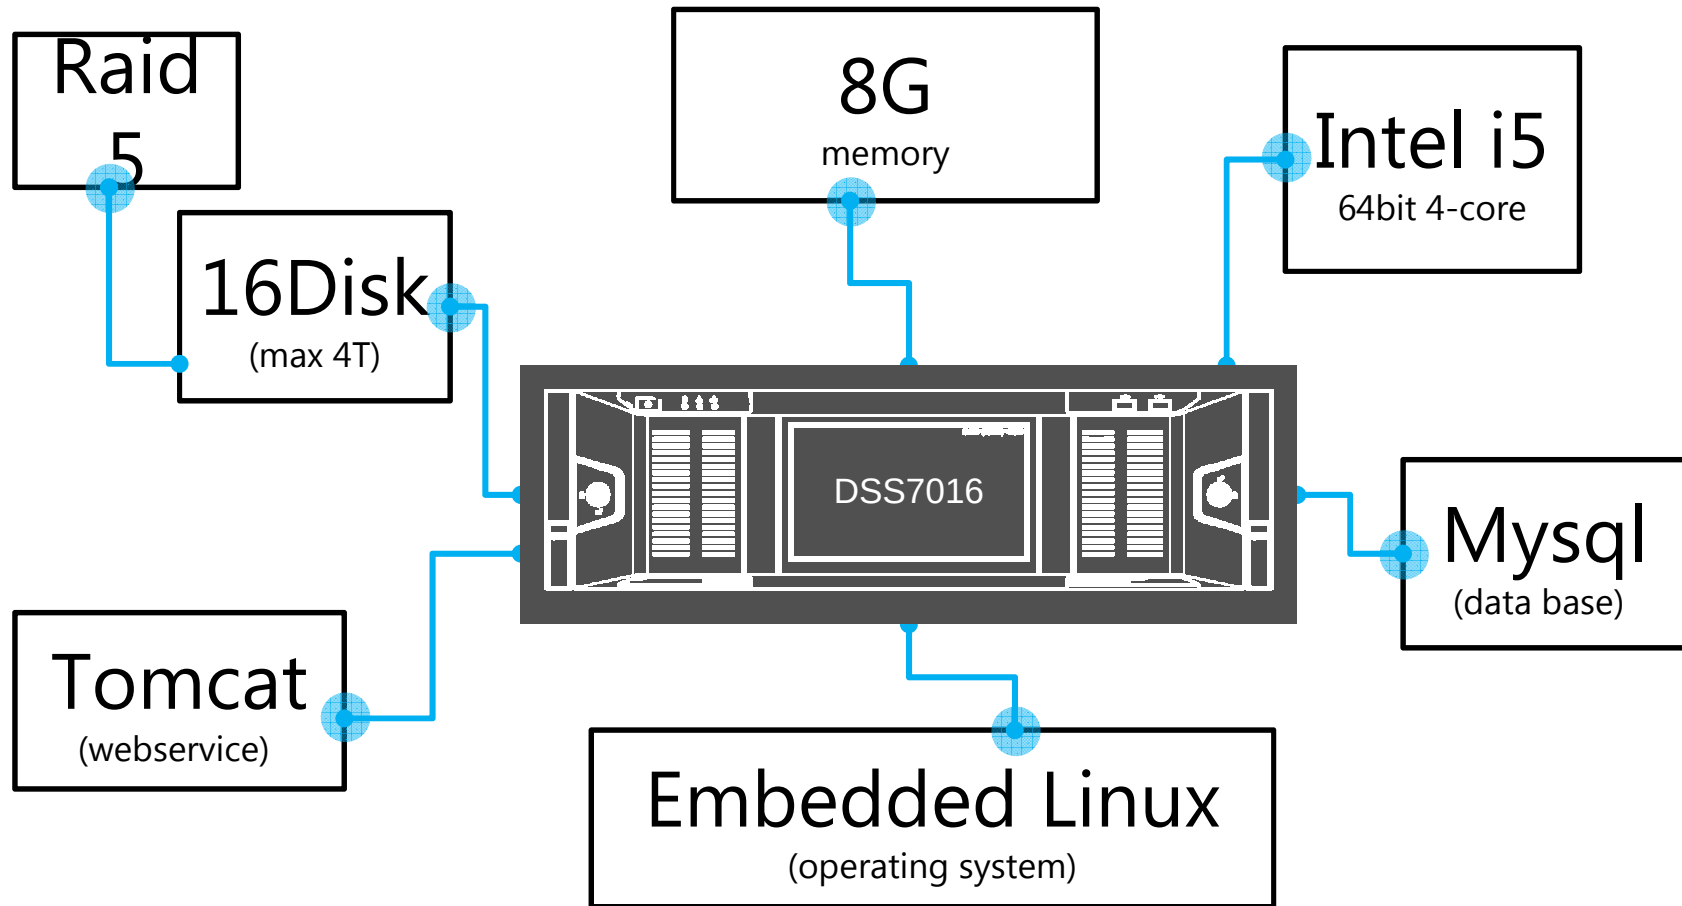


Key Products

DSS7016

Centre management devices

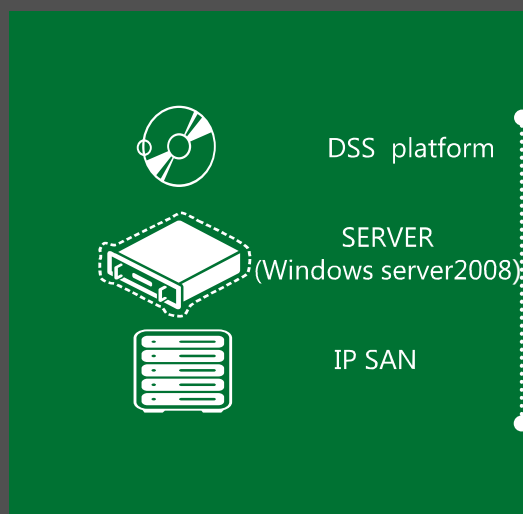

DSS7016 platform

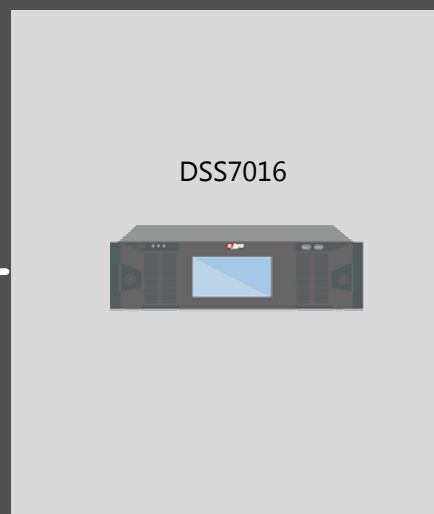

Devices

Encode device

IP camera,
DVR & NVR
SVR/EVS



Alarm device

Alarm host



DSS client

B/S client/S client
Mobile phone client



Key Products

DSS7016



the performance listed above is for one device only

Key Products

DSS7016

DSS 7016

350 channels@2M
175 channels@4M
85 channels@8M



DSS7016

network

Clients

700 Mbps

DSS client

B/S client/S client
Mobile phone client



Transfer Capability is 700Mbps

Key Products

DSS7016

DSS 7016

350 channels@2M
175 channels@4M
85 channels@8M




DSS7016



IPSAN

IPSAN

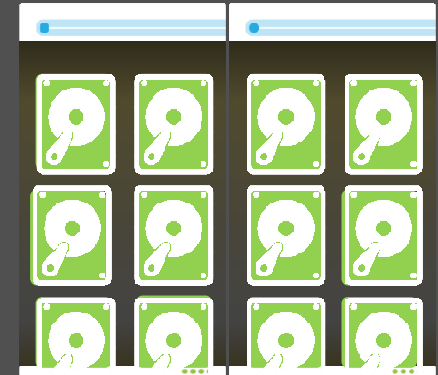

700 Mbps

Storage Capability is 700Mbps



Consider it done.